



Aerospace Engine Dynamic Blade Loading Monitoring

Torque telemetry of strain gage signals on inducer and
quill shafts of an axial flow pump

Application: Aerospace Engine Dynamic Blade Loading Monitoring

Torque telemetry of strain gage signals on inducer and quill shafts of an axial flow pump

Industry: Aerospace


Product: AT-7000

Parameters measured: Torque

A major aerospace company needed a reliable and compact method of monitoring the dynamic blade motion of a rocket's pump at 6000 RPM. The wireless transmission of strain measurements through use of a center-of-shaft mounted AT-7000 multichannel digital telemetry system provided the desired dynamic torque information. With an easy to operate turn-key installation, signals were measured, digitized, and transmitted from eight channels of 350 ohm strain gages. The AT-7000 provided all excitation and signal conditioning necessary for the strain gages, and also provided remotely controlled shunt calibration for all channels. Sample rates of 5888 samples per second provided DC to 2 kHz bandwidth signal reconstruction at the remote Receiver.

Benefits:

- Compact center of shaft design for high G force
- Induction powered- no batteries
- EMI resistant digital telemetry
- Anti-aliased data
- Precision measurements with good bandwidths
- No slip rings; nothing to wear or maintain

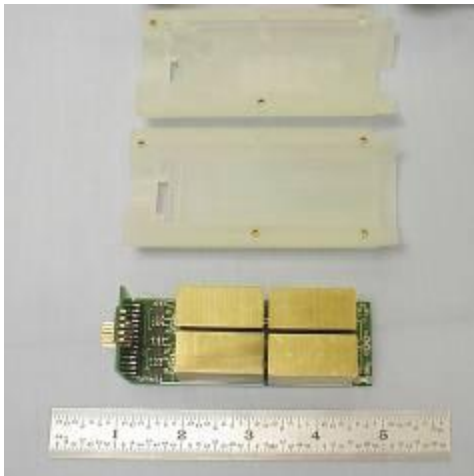



The picture above-left shows the Transmitter's electronics modular design for the 8 strain measurements; on the upper right, the electronics are shown in a rapid-prototype housing prior to insertion in a metal coupling. The exterior of the coupling, with a glass laminate induction power pickup coil assembly is shown in the lower left picture. The Receiver (digital to analog outputs device) is shown on the lower right.

The AT-7000 can also be configured in a clamp collar for mid-shaft mounting, and can be used to measure rotor temperatures, voltages and currents, detection of ground faults, and torsional vibration.



What are divisions of PCB Piezotronics?

PCB Piezotronics, a member of the PCB Group families of companies, has five major divisions, all of which offer targeted sensor technologies. These divisions are supported by an active outside direct sales force of Field Application Engineers, as well as international direct sales offices throughout the world. Individual PCB Piezotronics divisions, locations and their primary product specialties include:



Depew, NY, USA - www.pcb.com – Piezoelectric, ICP®, piezoresistive & capacitive pressure, acoustic, force, torque, load, strain, shock & vibration sensors.



Depew, NY, USA - www.pcb.com/aerospace – Sensors & Instrumentation for aerospace & defense applications, including air and spacecraft testing.



Farmington Hills, MI & Depew, NY, USA - www.pcb.com/auto – Sensors & Instrumentation for automotive testing, including modal analysis; NVH; component durability; powertrain testing; vehicle dynamics; safety and regulatory testing.



Depew, NY, USA - www.imi-sensors.com – Industrial vibration sensors, bearing fault detectors, mechanical vibration switches, panel meters, cables & accessories for predictive maintenance and equipment protection. Also providing pressure sensors and accelerometers for precision measurement requirements in the power generation and energy industries



Farmington Hills, MI & Provo, UT, USA www.larsondavis.com – Precision microphones, sound level meters, noise dosimeters, audiometric calibration systems.



Farmington Hills, MI, USA - www.pcb.com/loadandtorque – High quality, precision load cells, wheel force transducers, torque transducers, telemetry systems, and fastener torque-tension test systems.



409 Front Street, Schenectady NY 12305 USA

Phone 518-393-2200 ■ Fax 716-684-0987

Email telemetry@pcb.com ■ Website www.accumetrix.com